

УДК 539.17

## ON THE $e/h$ RATIO OF THE ELECTROMAGNETIC CALORIMETER

*Y.A.Kulchitsky\**

The method of extraction of the  $e/h$  ratio for electromagnetic compartment of combined calorimeter is suggested and the noncompensation was determined. The results agree with the Monte Carlo prediction and results of the weighting method for electromagnetic compartment of combined calorimeter. The new easy method of a hadronic energy reconstruction for a combined calorimeter is also suggested. The proposed methods can be used for combined calorimeter, which is being designed to perform energy measurement in a next-generation high-energy collider experiment like ATLAS at LHC.

The investigation has been performed at the Dzhelapov Laboratory of Nuclear Problems, JINR.

### Об $e/h$ отношении для электромагнитного калориметра

*Ю.А.Кульчицкий*

Предложен метод определения  $e/h$  отношения для электромагнитного калориметра как части комбинированного калориметра, и представлены результаты его применения. Полученные результаты согласуются с предсказаниями моделирования и результатами, полученными с использованием весового метода. Предложен новый простой метод измерения энергии адронов в комбинированных калориметрах. Описанные методы могут быть использованы для калориметрических комплексов следующего поколения коллайдерных экспериментов в физике высоких энергий, подобных эксперименту ATLAS на LHC.

Работа выполнена в Лаборатории ядерных проблем им. В.П.Джеллепова ОИЯИ.

## 1. INTRODUCTION

The future experiment ATLAS [1, 2] at the Large Hadron Collider (CERN) will include a combined calorimeter [3] with two separate units in the central region: the liquid-argon electromagnetic calorimeter [4] and the iron-scintillating hadronic calorimeter [5–8].

For many tasks of calorimetry it is necessary to know a noncompensation of combined calorimeter compartments. As to the hadronic calorimeter, there is the detailed information

---

\*Permanent adress: Institute of Physics, National Academy of Sciences, Minsk, Belarus. E-mail: Iouri.Koultchitski@cern.ch

about the  $e/h$  ratio presented in [5, 9, 10]. But as to the electromagnetic calorimeter [11], reliable information is practically absent.

The aim of the present work is to develop the method for the determination of the electromagnetic compartment noncompensation and to compare the results of this method with the results of weighting method [12, 13] and Monte Carlo prediction [14] for the same calorimeter. The new method of an energy reconstruction for combined calorimeter is also presented. For detailed understanding of performance of the future calorimetry the combined calorimeter set-up has been made consisting of the liquid-argon electromagnetic calorimeter inside the cryostat and downstream the iron-scintillating hadronic calorimeter [15–17].

## 2. NEW METHODS

The response,  $R$ , of a calorimeter to a hadronic shower is the sum of the contributions from the electromagnetic,  $E_e$ , and hadronic,  $E_h$ , parts of the hadronic shower energy,  $E = E_e + E_h$ , [18]

$$R = e \cdot E_e + h \cdot E_h , \quad (1)$$

where  $e$  ( $h$ ) is the energy-independent coefficient of transformation of electromagnetic (hadronic) part of a shower energy to response. Therefore an incident energy is

$$E = (1/e) \cdot (e/\pi) \cdot R , \quad (2)$$

where

$$\frac{e}{\pi} = \frac{e/h}{1 + (e/h - 1) \cdot k \cdot \ln(E)} , \quad (3)$$

$f_{\pi^0} = k \cdot \ln(E) = E_e/E$  is a fraction of electromagnetic energy. In the case of a combined calorimeter the incident energy is deposited into an electromagnetic compartment,  $E_{em}$ , into a hadronic compartment,  $E_{had}$ , and into a dead material between the two calorimeters,  $E_{dm}$ . Using relation (2) the following expression has been obtained:

$$E = E_{em} + E_{dm} + E_{had} = \frac{1}{e_{em}} \left( \frac{e}{\pi} \right)_{em} R_{em} + E_{dm} + \frac{1}{e_{had}} \left( \frac{e}{\pi} \right)_{had} R_{had} , \quad (4)$$

where  $R_{em}$  ( $R_{had}$ ) is a response of an electromagnetic (hadronic) calorimeter compartment,  $1/e_{em}$  [16, 19] and  $1/e_{had}$  [16] are the energy calibration constants for electromagnetic and hadronic calorimeters.

Equation (4) is the basic formula for the new, nonparametrical, method of a hadronic energy reconstruction for a combined calorimeter. This method does not require the determination of any parameters by a minimisation technique and uses known  $e/h$  ratios and electron calibration constants. In the right side of Eq. (4), an energy is under a logarithmic function, therefore for achievement of convergence with an accuracy of  $\approx 1\%$  only the first approximation is sufficient. The obtained reconstruction of the mean values of energies is within  $\pm 1\%$  and this accuracy can be compared with the results from Ref. 20, 16. The fractional energy

resolution is comparable with the benchmark method result [16]. The method can be used for the fast energy reconstruction in the trigger.

From expression (4) the value of the  $(e/\pi)_{em}$  ratio can be obtained

$$\left(\frac{e}{\pi}\right)_{em} = \frac{E_{beam} - E_{dm} - E_{had}}{R_{em} \cdot (1/e_{em})}. \quad (5)$$

The  $(e/h)_{em}$  ratio can be inferred from (3), where  $E$  is the beam energy. For calculation of the  $E_{had}$  the value  $(e/h)_{had}$  [9] was used and  $E$  in (3) is the energy deposited in the hadronic calorimeter,  $k = 0.11$  [14]. The term  $E_{dm}$  is taken similar to [15,16]:  $E_{dm} = (1/e_{dm}) \cdot \sqrt{E_{em,l} \cdot E_{had,f}}$ , where  $E_{em,l}$  is an energy released in a last depth of an electromagnetic calorimeter and  $E_{had,f}$  is an energy released in a first depth of a hadronic calorimeter. The validity of this approximation has been tested by the experimental study [16,17] and by the Monte Carlo simulation [21,22].

### 3. RESULTS

The mean values of the  $(e/\pi)_{em}$  distributions, derived by (5) and extracted by fitting in the  $\pm 2\sigma$  [23], are given in the Table and shown in the Figure (black circles) as a function of the energy. The fit of  $(e/\pi)_{em}$  values by the expression (3), with two parameters, yields  $(e/h)_{em} = 1.74 \pm 0.04$  and  $k = 0.108 \pm 0.004$ . The value of parameter  $k$  is in good agreement with the well-known one — 0.11 [14]. For fixed parameter  $k$  the value of noncompensation is  $(e/h)_{em} = 1.77 \pm 0.02$ . The quoted errors are the statistical ones and obtained from the fit. The systematic error, which is a consequence of the uncertainties in the input constants used in the (5), is estimated to be  $\pm 0.04$ .

In Ref. 14 it is shown that the  $e/h$  ratio for nonuranium calorimeters with high- $Z$  absorber material is satisfactorily described by the formula:

$$\frac{e}{h} = \frac{e/mip}{0.41 + f_n \cdot n/mip}, \quad (6)$$

where  $f_n$  is a constant determined by the  $Z$  of the absorber (for lead  $f_n = 0.12$ ) [24,25],  $e/mip$  and  $n/mip$  represent the calorimeter response to electromagnetic showers and to MeV-type neutrons, respectively. These responses are normalised to the one for minimum ionising particles. The Monte Carlo calculated  $e/mip$  and  $n/mip$  values [26] for the lead-liquid-argon electromagnetic calorimeter [27] are  $e/mip = 0.78$  and

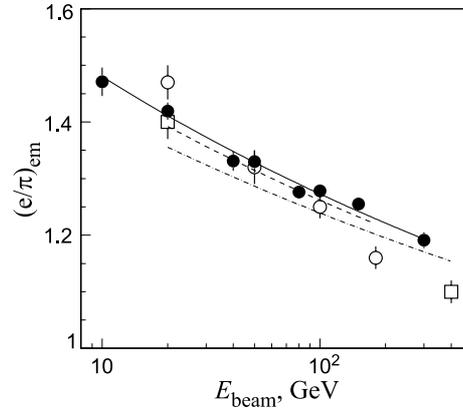


Fig. 1. The  $(e/\pi)_{em}$  ratios as a function of the beam energy for this method (black circles) and for weighting method (open circles for Ref. [12] and open squares for Ref. [13]). The lines are the result of a fit of Eq. (3) with free  $e/h$  parameter and  $k = 0.11$ : solid line is for the [23] data, dashed line is for the [12] data and dash-dotted line is for the [13] data

**Table. The  $(e/\pi)_{em}$  ratios as a function of the beam energy**

$E$ (GeV)	$(e/\pi)_{em}$		
	[23]	[12]	[13]
10	$1.47 \pm 0.03$	–	–
20	$1.42 \pm 0.02$	$1.47 \pm 0.03$	$1.40 \pm 0.03$
40	$1.33 \pm 0.02$	–	–
50	$1.33 \pm 0.02$	$1.32 \pm 0.03$	–
80	$1.28 \pm 0.01$	–	–
100	$1.28 \pm 0.01$	$1.25 \pm 0.02$	–
150	$1.26 \pm 0.01$	–	–
180	–	$1.16 \pm 0.02$	–
300	$1.19 \pm 0.02$	$0.96 \pm 0.02$	–
400	–	–	$1.10 \pm 0.02$

$n/mip < 0.5$  and leading to  $e/h > 1.66$ . The measured value of the  $(e/h)_{em}$  ratio agrees with this prediction.

Formula (6) shows that  $e/mip$  is very important for understanding the compensation in the lead-liquid-argon calorimeters. The noncompensation increases when the sampling frequency is also increased [24]. A large fraction of the electromagnetic energy is deposited through very soft electrons ( $E < 1$  MeV) produced by Compton scattering or the photoelectric effect. The cross sections for these processes strongly depend on  $Z$  and practically all these photon conversions occur in the absorber material. The range of the electrons produced in these processes is very short,  $\sim 0.7$  mm for 1 MeV electron in lead. Such electrons only contribute to the calorimeter signal if they are produced near the boundary between the lead and the active material. If the absorber material is made thinner this effective boundary layer becomes a larger fraction of the total absorber mass and the calorimeter response goes up. This effect was predicted by EGS4 simulation [24]. It explains that predictions for the GEM [28] accordion electromagnetic calorimeter (1 mm lead and 2 mm liquid-argon) are the  $e/mip = 0.86$  and the  $e/h > 1.83$ . The Monte Carlo calculations also predict that the electromagnetic response for liquid-argon calorimeters (due to the larger  $Z$  value of argon) is consistently larger than for calorimeters with plastic-scintillator readout. The signal from neutron ( $n/mip$ ) suppressed with factor 0.12 and the  $n-p$  elastic scattering products do not contribute to the signal of liquid-argon calorimeters. These detectors only observe the  $\gamma$ 's produced by inelastic neutron scattering and from thermal neutron capture [24].

In Refs. 12, 13 the following definition of an  $e/\pi$  ratio for the first compartment of the combined calorimeter is adopted. The estimators for pion and electron energies, respectively, are  $E = c_{em}^\pi \cdot R_{em} + c_{had}^\pi \cdot R_{had}$  and  $E = c_{em}^e \cdot R_{em}$ , where  $R_{em}$  and  $R_{had}$  are responses of electromagnetic and hadronic compartments of a combined calorimeter,  $c_{em}^e$  (energy independent within 1%) is the energy calibration constant for the electromagnetic calorimeter,  $c_{em}^\pi$  and  $c_{had}^\pi$  are weighting parameters for pions. These parameters were found using a minimisation procedure for an energy resolution ( $\sigma/E$ ) at all beam energies. In Refs. 12, 13 an electron/pion ratio is defined as  $(e/\pi)_{em} = c_{em}^\pi / c_{em}^e$ . One can find this definition from (4) for an electromagnetic compartment, where  $c_{em}^\pi = 1/e_{em} \cdot (e/\pi)_{em}$  and  $1/e_{em} = c_{em}^e$ .

The results of this weighting method for  $(e/\pi)_{em}$  ratios are given in the Table and shown in the Figure (open circles are for [12] and open squares are for [13]). In the energy region

$\leq 100$  GeV the [23] data are in good agreement with [12, 13] data and in disagreement for energies  $> 100$  GeV. Fit of the  $(e/\pi)_{em}$  values by the expression (3), with two parameters, yields  $(e/h)_{em} = 2.28 \pm 0.19$  and  $k = 0.143 \pm 0.006$  for [12] data and  $(e/h)_{em} = 1.93 \pm 0.13$  and  $k = 0.135 \pm 0.007$  for [13] data. Note, that problematical value of  $(e/\pi)_{em} = 0.96 \pm 0.02$  at 300 GeV [12] is excluded from the fit. One can see that the parameters  $k$  are much bigger than their well-known value and the  $(e/h)_{em}$  are bigger than our result. For fixed parameter  $k = 0.11$  the result of the fit are  $(e/h)_{em} = 1.73 \pm 0.10$  for [12] data and  $(e/h)_{em} = 1.64 \pm 0.18$  for [13] data. In both the cases we calculated errors of the  $e/h$  taking into account the values of  $\langle \chi^2 \rangle$ . The found  $e/h$  ratios are in agreement with our result within error bars. Therefore, one can see that the weighting method leads to distortion of the  $(e/\pi)_{em}$  ratios.

#### 4. CONCLUSIONS

The method of extraction of the  $e/h$  ratio for electromagnetic compartment of a combined calorimeter is suggested and the noncompensation was determined. The results agree with the Monte Carlo prediction and the results of the weighting method for electromagnetic compartment of a combined calorimeter. The new easy method of a hadronic energy reconstruction for a combined calorimeter is also suggested. The proposed methods can be used for a combined calorimeter, which is being designed to perform energy measurement in a next-generation high energy collider experiment like ATLAS at LHC.

#### Acknowledgement

The author would like to thank P. Jenni, J. Budagov and M. Nessi for fruitful discussions and attention for this work. I am grateful to M. Kuzmin, V. Vinogradov, F. Gianotti and M. Cobal for constructive advices and fruitful discussions.

#### References

1. ATLAS Collaboration — ATLAS Technical Proposal for a General Purpose pp Experiment at the Large Hadron Collider, CERN/LHCC/94-93, 1994, CERN, Geneva, Switzerland.
2. ATLAS Collaboration — ATLAS Detector and Physics Performance Technical Design Report, Volume 1, CERN/LHCC/99-14, ATLAS-TDR-14, Volume 2, CERN/LHCC/99-15, ATLAS-TDR-15, 1999, CERN, Geneva, Switzerland.
3. ATLAS Collaboration — ATLAS Calorimeter Performance Technical Design Report, CERN/LHCC/96-40, ATLAS-TDR-1, 1996, CERN, Geneva, Switzerland.
4. ATLAS Collaboration — ATLAS Liquid Argon Calorimeter Technical Design Report, CERN/LHCC/96-41, ATLAS-TDR-2, 1996, CERN, Geneva, Switzerland.

5. ATLAS Collaboration — ATLAS TILE Calorimeter Technical Design Report, CERN/LHCC/96-42, ATLAS-TDR-3, 1996, CERN, Geneva, Switzerland.
6. Kulchitsky Y. — Proceedings of the International Conference on Hadron Structure 98, 1998, Kosice, Slovakia, p.401–417.
7. Kulchitsky Y. — Proceedings of the VIII International Conference on Calorimetry in HEP, June 1999, Lisbon, Portugal; 2000, p.401–411.
8. Amaral P. et al. — NIM, 2000, v.A443, p.51.
9. Budagov J., Kulchitsky Y. et al. — JINR, E1-95-513, Dubna, 1995.
10. Kulchitsky Y. et al. — JINR, E1-99-12, Dubna, 1999.
11. Gianotti F. et al. — NIM, 1992, v.A315, p.285;  
Fabjan C.W. — NIM, 1995, v.A360, p.228;  
Gingrich D.M. et al. — NIM, 1995, v.A364, p.290;  
Aubert B. et al. — NIM, 1993, v.A325, p.118; NIM, 1992, v.A321, p.467.
12. Stipevic M. — First Evaluation of Weighting Techniques to Improve Pion Energy Resolution in Accordion Liquid Argon Calorimeter, RD3-Note-44, 18 pp., 1993, CERN, Geneva, Switzerland.
13. Gingrich D.M. et al. — NIM, 1995, v.A355, p.290.
14. Wigmans R. — Proceedings of the 2nd Int.Conf. on Calorimetry in HEP, Capri, Italy, 1991 p.24-46.
15. Z.Ajaltouni et al. — NIM, 1997, v.A387, p.333.
16. Akhmadaliev S. et al. — NIM A, 2000, (in press).
17. Cobal M. et al. — Analysis Results of the April 1996 Combined Test of the LArgon and TILECAL Barrel Calorimeter Prototypes, ATL-TILECAL-98-168, 1998, CERN, Geneva, Switzerland.
18. Groom D. — Proceedings of the Workshop on Calorimetry for the Supercolliders, Tuscaloosa, Alabama, USA, 1989.
19. Kulchitsky Y., Kuzmin M. — JINR, E1-98-336, Dubna, 1998.
20. Casado M.P., Cavalli-Sforza M. — HI-Inspired Analysis of the 1994 Combined Test of the Liquid Argon and Tilecal Calorimeters Prototypes, ATL-TILECAL-96-75, 1996, CERN, Geneva, Switzerland.
21. Efthymiopoulos I. — Comparison between the ATLAS/TileCal Hadron Barrel Calorimeter Prototype Test Beam Data and Hadronic, ATL-TILECAL-96-092, 1996, CERN, Geneva, Switzerland.
22. Kulchitsky Y. — Particles and Nuclei, Letters; 2000, 2[99]-2000, p.52.

23. Kulchitsky Y.A. et al. — JINR, E1-99-303, Dubna, 1999.
24. Wigmans R. — NIM, 1987, v.A259, p.389.
25. Wigmans R. — Rev. Sci. Inst., 1998, v.69, 11, pp.3723.
26. Wigmans R. — NIM, 1988, v.A265, p.273.
27. Costa G. — Proc. 2nd Int. Conf. on Calorimetry in HEP, Capri, Italy, 1991,p.237.
28. Barish B.C. — Proceedings: High Energy Physics, Dallas, USA, 1992, v.2, p.1829.