

ON THE SHAPE DEPENDENCE OF THE TANGENTIAL CASIMIR FORCE

*Yu. S. Voronina*¹, *P. K. Silaev*

Physics Department, Moscow State University, Moscow

The normal and tangential Casimir force for the rack gear is calculated numerically in the case of ideal boundary conditions for the electromagnetic field — perfect reflection on the boundaries. The resulting tangential force appears to be essentially shape-dependent. Relatively small shape variations lead to the essential changes in tangential force, whereas normal force remains almost unchanged.

Вычислены нормальная и тангенциальная составляющие силы Казимира для двух идеально проводящих компонентов реечной передачи. Как показали расчеты, результирующая тангенциальная сила существенно зависит от формы реек. Небольшая модификация этой формы приводит к значительным изменениям тангенциальной силы, в то время как нормальная составляющая оказывается почти постоянной.

PACS: 03.70.+k; 12.20.Ds

INTRODUCTION

During the last two decades a large number of studies, both theoretical and experimental, deal with the Casimir effect [1]. The growing interest in this problem is motivated by experimental results [2–5] that provide relatively precise confirmation of QFT predictions which lies out of the bounds of particle physics. On the other hand, the Casimir effect leads to the possibility of friction-free nanomechanical devices. Recent studies have aimed to find configuration with the repulsive Casimir force without dielectric fluid. So the Casimir force was calculated for different geometry configurations, especially for the configurations with repulsive and tangential forces. Some configurations are smooth (sphere, cylinder, parabolic cylinder, plate [6–8]), whereas some configurations are sharp (wedge, cone, knife, needle [8–11]) or simply rectangle (flat metallic surfaces with $\pi/2$ angles between them).

It is well known that in classical electrodynamics the precise shape of bodies (sharp edges, needles, etc.) has a significant influence on the corresponding electromagnetic solutions. So the question arises as to whether the small changes of shape can change the results for the Casimir force? From [11] one can conclude that it is quite possible. For instance, even for a cone with finite angle we observe additional singularity, caused by the vertex of the cone. It should be stressed that in [8] the case of sharp knife edge is considered as a limiting case of parabolic cylinder, with the smooth dependence on the parameter of parabolic curve. Our approach is quite different: we preserve the «global» shape properties, and change the geometry only in the nearest vicinity of the edges.

¹E-mail: voronina-yulya@yandex.ru

Let us consider the rack gear (see Fig. 1 for geometry details). We have two profiled plates, parallel to y axis; the period of profiles is a ; the distance between plates is b , and the relative shift of plates is s . This geometry is translational invariant along z axis (z axis is orthogonal to picture plane). For simplicity we consider the ideal case: the material of plates is perfect metal (perfect boundary reflection), without any realistic frequency dependence. We will also ignore the temperature dependence. So we consider the following question: what happens if we change all $\pi/2$ angles of this rectangular geometry by the edges? We will investigate two cases: case A — flat edge, where the $\pi/2$ angle is replaced by two $3\pi/4$ angles, and case B — smooth edge, where the $\pi/2$ angle is replaced by cylinder of appropriate radius (see Fig. 1).

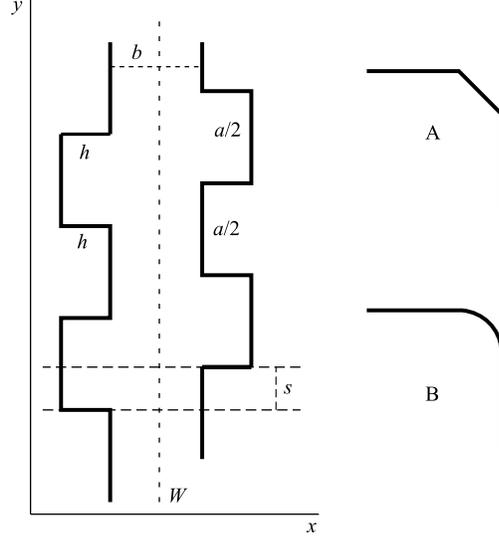


Fig. 1. System parameters and shape of edges: a — period, h — depth of profile, s — shift, b — width of the gap. Dotted line W denotes the surface in the gap between profiled plates. Case A — flat edge; case B — smooth edge

From the standard explanation of the tangential Casimir force for this geometry, one can conclude that there should not be any dependence on the edge shape. Indeed, for fixed gap width b in the case of zero shift ($s = 0$) the average distance between our bodies (plates) is less than in the case of half-period shift ($s = a/2$). So we should obtain the tangential force that cannot depend on the shape details. However, this conclusion is correct only if we can neglect side effects at the edges of profile wells, but for the system considered the side effects are significant (see Sec. 1). Side effects can essentially depend on the shape details, so it is possible to observe shape dependence of the tangential Casimir force for our geometry.

From the standard explanation of the tangential Casimir force for this geometry, one can conclude that there should not be any dependence on the edge shape. Indeed, for fixed gap width b in the case of zero shift ($s = 0$) the average distance between our bodies (plates) is less than in the case of half-period shift ($s = a/2$). So we should obtain the tangential force that cannot depend on the shape details. However, this conclusion is correct only if we can neglect side effects at the edges of profile wells, but for the system considered the side effects are significant (see Sec. 1). Side effects can essentially depend on the shape details, so it is possible to observe shape dependence of the tangential Casimir force for our geometry.

1. CALCULATION METHOD

One of the most efficient ways to estimate a force between two isolated bodies is to calculate energy-momentum tensor for the vacuum state on the surface W enclosing one of the bodies:

$$F_i = \oint_W \langle 0 | T_{ij} | 0 \rangle dS_j.$$

Vacuum expectation value of the energy-momentum tensor can be expressed in terms of Euclidean Green function via integral over pure imaginary frequency $\omega(\mu) = i\mu$. Originally, such an approach was suggested in [12] for evaluation of Van der Waals forces between two bodies. Recently this method has been advanced for numerical calculation of the Casimir force [13, 14]. It is interesting to note that the selection of the integration contour $\omega(\mu) = i\mu$ is not unique. The employment of different variant of the frequency contour was considered in [14]. Here the problem is formulated at real «frequency» μ and effective complex dielectric permittivity.

For the problem in question, the surface W separating two plates can be chosen as $y - z$ plane (see Fig. 1). After integration on y

$$F_n = \int_{y_0}^{y_0+a} \langle 0|T_{11}|0\rangle dy, \quad F_\tau = \int_{y_0}^{y_0+a} \langle 0|T_{12}|0\rangle dy \quad (1)$$

for arbitrary y_0 we obtain the normal and tangential force, corresponding to one period a in y -direction and unit length in z -direction. Then we divide these values (for one period) by the period length, and so we get the «density» of both forces.

For further computation the Euclidean Green function $G_{ij}(\mu, \mathbf{u}, \mathbf{v})$ should be constructed, which is transversal:

$$\partial_{u_i} G_{ij}(\mu, \mathbf{u}, \mathbf{v}) = 0, \quad \partial_{v_j} G_{ij}(\mu, \mathbf{u}, \mathbf{v}) = 0; \quad (2)$$

it also satisfies boundary conditions

$$\tau_i G_{ij}(\mu, \mathbf{s}, \mathbf{v}) = 0 = \tau_j G_{ij}(\mu, \mathbf{u}, \mathbf{s}), \quad (3)$$

where $\boldsymbol{\tau}$ is tangent vector to the boundary surface at a point \mathbf{s} , and, finally, there should be solution to the equation

$$\Delta G_{ij}(\mu, \mathbf{u}, \mathbf{v}) - \mu^2 G_{ij}(\mu, \mathbf{u}, \mathbf{v}) = \delta_{ij}(\mathbf{u} - \mathbf{v}), \quad (4)$$

where

$$\delta_{ij}(\mathbf{u} - \mathbf{v}) = \int_{-\infty}^{\infty} d\mathbf{k} \left(\delta_{ij} - \frac{k_i k_j}{k^2} \right) \frac{e^{i\mathbf{k}(\mathbf{u}-\mathbf{v})}}{(2\pi)^3}$$

is transversal delta function. One can easily verify that

$$\langle 0|A_i(\mathbf{u})A_j(\mathbf{v})|0\rangle = -\frac{1}{\pi} \int_0^{\infty} d\mu G_{ij}(\mu, \mathbf{u}, \mathbf{v}). \quad (5)$$

The energy-momentum tensor is constructed of the derivatives of the left-hand side on u_α and v_β for $\mathbf{v} = \mathbf{u}$, so we can estimate the force, provided we solve equations for the Euclidean Green function. Now we should take into account the translational invariance on z . We perform Fourier transformation along z axis.

Definitely, one can also construct the series along y axis, because our geometry is periodic in y -direction, but the straightforward solution of the two-dimensional equation appears to be more simple and effective. After Fourier transformation along z axis we get

$$G_{ij}(\mu, \mathbf{u}, \mathbf{v}) = \frac{1}{2\pi} \int dq \exp(iq(u_3 - v_3)) G_{ij}(q, \mu, \mathbf{u}_2, \mathbf{v}_2), \quad (6)$$

where \mathbf{u}_2 and \mathbf{v}_2 are two-dimensional vectors, constructed from the first two components of \mathbf{u} and \mathbf{v} , respectively. Finally, for the arbitrary term in the expression of energy-momentum tensor for vacuum state we obtain

$$\langle 0|\partial_{u_\alpha} A_i(\mathbf{u})\partial_{v_\beta} A_j(\mathbf{v})|0\rangle|_{\mathbf{u}=\mathbf{v}} = -\frac{1}{2\pi^2} \int dq \partial_{u_\alpha} \partial_{v_\beta} \int_0^{\infty} d\mu G_{ij}(q, \mu, \mathbf{u}_2, \mathbf{v}_2)|_{\mathbf{u}_2=\mathbf{v}_2}. \quad (7)$$

Here $\partial_{u_3} \equiv iq$ and $\partial_{v_3} \equiv -iq$. For distant bodies, renormalization of this expression is trivial — subtraction of the Green function $G_{ij}^0(q, \mu, \mathbf{u}_2, \mathbf{v}_2)$ for Minkowski space yields a finite expression.

Therefore, the renormalized vacuum expectation values (5), (7) are expressed through the difference $G_{ij}^{\text{ren}}(q, \mu, \mathbf{u}_2, \mathbf{v}_2) = G_{ij}(q, \mu, \mathbf{u}_2, \mathbf{v}_2) - G_{ij}^0(q, \mu, \mathbf{u}_2, \mathbf{v}_2)$, which is the solution of the homogeneous Helmholtz equation with the boundary condition $\tau_j G_{ij}^{\text{ren}}(q, \mu, \mathbf{u}_2, \mathbf{s}_2) = -\tau_j G_{ij}^0(q, \mu, \mathbf{u}_2, \mathbf{s}_2)$, where \mathbf{s}_2 lies on the plate surface. One of the most effective approaches to solving the problem for $G_{ij}^{\text{ren}}(q, \mu, \mathbf{u}_2, \mathbf{v}_2)$ is the boundary-element method (BEM) [15–17]. In the present work we apply a slightly modified BEM: instead of the standard spline approach for the given boundary element we use polynomial approximation, based on surrounding elements. It is similar, but not precisely equal to spline. Additionally, we impose more conditions than the number of elements and just minimize a discrepancy in the resulting overdetermined linear system. Both modifications increase precision for the given number of elements.

To estimate errors of this computation scheme, we perform calculations for the trivial case $h = 0$, with well-known explicit analytical result. In further calculations we use the number of points per unit length of the boundary that in this trivial case yields relative error about 10^{-4} . We also estimate error for our nontrivial boundary by increasing points density and subsequent comparison of results. It appears that the nontrivial boundary form increases relative error up to 10^{-3} .

2. RESULTS AND DISCUSSION

We use the natural system of units $\hbar = c = 1$ and choose the geometry parameters $a = 2$, $h = 0.5$, $b = 1$. This choice provides us with comparable order of magnitude for the tangential and normal force density. For the trivial case $h = 0$, the density of the normal force will be equal to $\pi^2/240 = 0.0411$, and this value will be used as a reference point. For plates with profile A, the edge length is $\sqrt{2}L = \sqrt{2} \cdot 0.08$ and in case B the radius of the corresponding cylinder is $R = 0.08$.

From Fig. 2 one can easily find that the value of the normal force density f_n (it should be stressed that here «density» means the value calculated for one period, divided by the length of period) for zero shift $s = 0$ ($f_n = 0.0124$) essentially differs from the half of our reference value ($0.0411/2 = 0.0205$). So side effects are significant. At the same time, the shape effects for zero shift can be neglected, because they are even smaller than the trivial estimation of these effects calculated with the proximity force approximation (PFA). Let us notice that we do not use the PFA directly because of its low accuracy. Instead, we multiply the normal force density for plates with edge calculated with the PFA by the normalization constant defined as the ratio of forces for rectangular geometry $N = f_n/f_n^{\text{PFA}}$, where $f_n^{\text{PFA}} = \frac{\pi^2}{480a} \left(\frac{1}{b^4} + \frac{1}{(b+2h)^4} \right)$ and the value f_n was calculated with the use of the method described in the previous section. For both the flat and the smooth edge we get approximately $f_n = 0.0121$, whereas PFA estimation yields $N f_n^{\text{PFA}} \approx 0.0119$ in case A, where

$$f_n^{\text{PFA}} = \frac{\pi^2}{720a} \left(\frac{1}{(b+2h-2L)^3} - \frac{1}{(b+2h)^3} + 3 \frac{a/2 - 2L}{b^4} \left(1 + \frac{b^4}{(b+2h)^4} \right) + \frac{2L}{b^2(b+2L)^2} \left(4 \frac{(b+L)^2}{b(b+2L)} - 1 \right) \right),$$

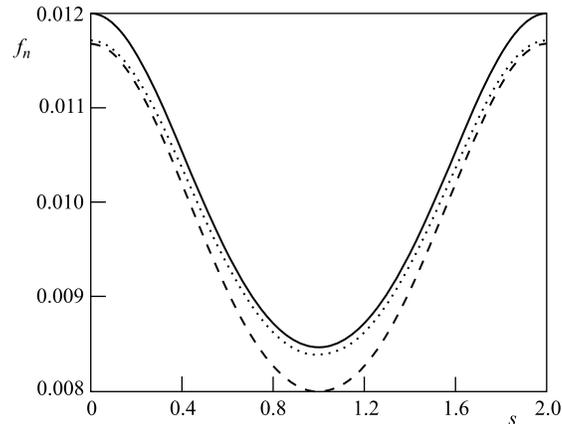


Fig. 2. Density of the normal force as a function of shift s . Solid line — rectangle case; dashed line — flat edge; dotted line — smooth edge

and $N f_n^{\text{PFA}} \approx 0.0122$ in case B, where

$$f_n^{\text{PFA}} = \frac{\pi^2}{240a} \left(\frac{(a/2 - 2R)}{b^4} + 2 \int_0^R \frac{dy}{(b + 2(R - \sqrt{R^2 - (R - y)^2}))^4} + \frac{(a/2 - 2R)}{(b + 2h)^4} + 2 \int_0^R \frac{dy}{(b + 2h - 2(R - \sqrt{R^2 - (R - y)^2}))^4} \right).$$

For the half-period shift $s = 1$, we obtain almost identical behavior. Side effects are significant, whereas shape effects are relatively small. The difference between the flat edge on the one side, and the smooth edge and rectangle case on the other side can be explained, if we take into account that the average distance between the bodies is definitely greater for the flat edge (in the case of half-period shift). So we can conclude that for the normal force the shape effects can be neglected, the change in force density appears to be about 2–3%.

On the contrary, for the density of the tangential force we obtain essential shape dependence (see Fig. 3). Even the absolute value of the difference of tangential forces among the rectangle case, flat edge case and smooth edge case is much greater than for the normal force. Let us remind that for the flat edge we just change one $\pi/2$ angle to two $3\pi/4$ angles, whereas for the smooth edge we have no angles at all. So the dependence on the shape of edge seems to be quite reasonable.

It should be noted that the different dependence on the edge shape for the normal and tangential force is quite reconcilable with energy reasons. Different energy functions for different shapes can have almost identical derivatives on the variable x (normal force), and quite different derivatives on the variable y (tangential force). Even for the normal force we observe different dependence on the shift s for different edge shapes (see Fig. 2).

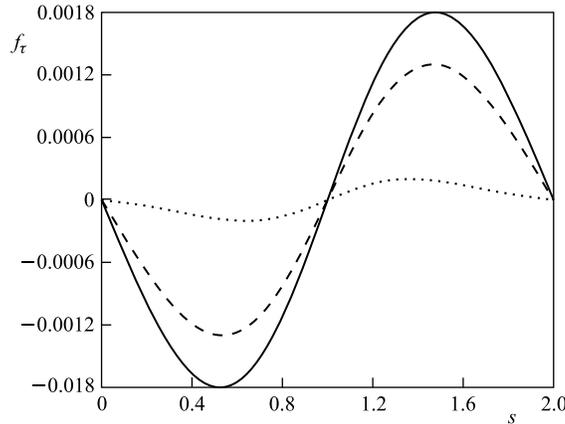


Fig. 3. Density of the tangential force as a function of shift s . Solid line — rectangle case; dashed line — flat edge; dotted line — smooth edge

For both the normal and the tangential force we obtain the regular dependence on the edge size. For example, in the case of flat edge and shift $s = 0.6$ we get

Edge size	0	0.04	0.08	0.12
Density of tangential force	0.00178	0.00153	0.00129	0.00110

For other values of the shift s we observe the same type of dependence. And for the case of smooth edge we also obtain this regular dependence.

CONCLUSION

Direct numerical computations lead us to the conclusion that (at least for the geometry considered) there is an essential dependence of the Casimir force on the details of geometry. If we change rectangle structures by the structure with edges (flat or smooth), it leads to essential variation of the tangential force. It should be noted that variation of the force value is not proportional to the relative size of edges: the maximum edge size we used was 0.14 — about 15% of typical length in our geometry, whereas the tangential force for smooth edge appears to be 8 times smaller than in rectangular case.

The result observed is definitely pure side effect, but sometimes side effects play a significant role. It should also be mentioned that we consider the case of perfect metallic surface (perfect mirror). The influence of realistic frequency dependence on the shape effects is not obvious. Probably, it can mask all these effects, but this can be specified only by the direct calculations. As for temperature dependence, from [11] we can conclude that nonzero temperature can only amplify the effect observed, because for flat surface and sharp edges the temperature dependence appears to be quite different.

Acknowledgements. The authors are grateful to Prof. K. Sveshnikov for interest and support, and to Dr. O. Pavlovski and M. Ulybyshev for valuable discussions.

REFERENCES

1. Casimir H. B. G. // Proc. K. Ned. Akad. Wet. 1948. V. 51. P. 793.
2. Lamoreaux S. K. // Phys. Rev. Lett. 1997. V. 78. P. 5.
3. Mohideen U., Roy A. // Phys. Rev. Lett. 1998. V. 81. P. 4549.
4. Bordag M. et al. Advances in the Casimir Effect. Oxford: Oxford Univ. Press, 2009.
5. Milton K. A. The Casimir Effect. Singapore: World Sci., 2001.
6. Teo L. P. // Phys. Rev. D. 2012. V. 85. P. 045027.
7. Teo L. P. // Intern. J. Mod. Phys. A. 2012. V. 27. P. 1230021.
8. Jaffe R. L. et al. // Phys. Rev. D. 2010. V. 81. P. 061701.
9. Gies H., Klingmuller K. // Phys. Rev. Lett. 2006. V. 97. P. 220405.
10. Graham N. et al. // Phys. Rev. D. 2011. V. 83. P. 125007.
11. Jaffe R. L. et al. // Proc. Nat. Acad. Sci. 2011. V. 108. P. 6867.
12. Dzyaloshinskii I. E., Lifshitz E. M., Pitaevskii L. P. // Adv. Phys. 1961. V. 10. P. 165.
13. Rodriguez A. et al. // Phys. Rev. A. 2007. V. 76. P. 032106.
14. Rodriguez A. W. et al. // Phys. Rev. A. 2009. V. 80. P. 012115.
15. Brebbia C. A., Dominguez J. Boundary Element Methods for Potential Problems // Appl. Math. Model. 1977. V. 1. P. 372.
16. Ern A., Guermond J. L. Theory and Practice of Finite Elements. Springer, 2004.
17. Wrobel L. C., Aliabadi M. H. The Boundary Element Method. Wiley, 2002.

Received on February 19, 2013.